


RE: Specification of Vacuum Autoloader Device type HAL-1.5P-EUH

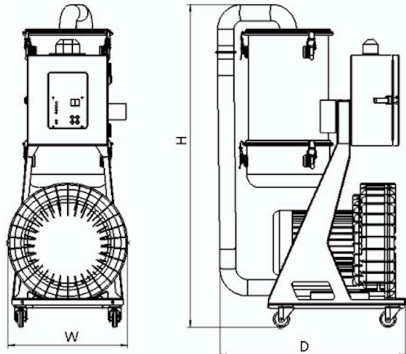

HAL-1.5P-EUH

- Main controller and hopper loader run independently, it is more safe and convenient to use
- Microcomputer control operation
- Independent filter + dust storage leads to convenient to remove the accumulated dust
- Control box is installed independently and easy to maintain
- Hopper is made by stainless steel, light, durable and easy to clean
- Equipped with AUTO ALARM for idling
- EU model is equipped with a digital computer board
- Our standard using EUH model is equipped with main power switch & PLC+Touch Screen HMI
- EUL model is equipped with main power switch and filter spray clean & PLC+Touch Screen HMI
- RS485 Network is available for EUH & EUL model as an option
- Two-stage is only suitable for EUH and EUL configuration

SPECIFICATION	MODEL	HAL-1.5P-EUH
MOTOR TYPE		INDUCTION
MOTOR POWER		1.1 kW (3Phase)
CONVEYING CAPACITY		450 kg/h
MATCHING HOPPER		MH-6L
MATERIAL PIPE/AIR PIPE		1.5"/1.5"
WEIGHT		76 kg
EXTERNAL DIMENSION		
	H. W. D.	1000 mm 350 mm 600 mm

*Note:

Type 300GE and 300GN voltage are 1Phase, 220V, 50Hz. Other types standard voltage are 3Phase, 380V, 50Hz.

We reserve the right to change specifications without prior notice. For special needs please let us know!