

SPECIFICATION of GRANULATOR (HSS)



HSS-400

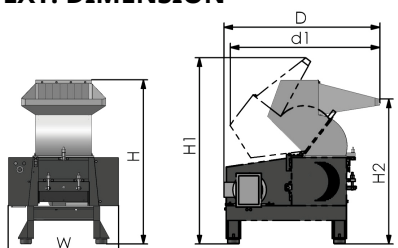


TYPE A



TYPE B

- This type is suitable for all kinds of plastic, including massive, rotundity, strip
- Our HSS Series Granulator equipped with standard all-steel blade. **Blade material SKD-11 is available as an option**
- 800 and above model are equipped with water-cooled bearing housing and cart collection bins
- STANDARD type equipped with overload protection, short circuit protection, hopper open shutdown protection
- Fan feed cyclone and dust collector are available as an option

MODEL		HSS-230	HSS-400	HSS-600	HSS-800	
SPECIFICATION						
MOTOR POWER		4 kW	7.5 kW	15 kW	22 kW	
ROTATING SPEED		640 rpm	650 rpm	580 rpm	560 rpm	
ROTOR BLADE	- Blade type A - Blade type B	6 pcs 3 pcs	12 pcs 3 pcs	18 pcs 6 pcs	24 pcs 6 pcs	
FIXED BLADE		2 pcs	2 pcs	4 pcs	4 pcs	
OUTPUT		100~200 kg/h	350~500 kg/h	450~600 kg/h	600~800 kg/h	
INFEED OPENING		160 x 230 mm	250 x 400 mm	310 x 600 mm	420 x 800 mm	
CRUSHING ROTARY SIZE		Ø205x230 mm	Ø250x400 mm	Ø330x600 mm	Ø415x800mm	
SCREEN HOLE DIAMETER		Ø 8 mm	Ø 10 mm	Ø 12 mm	Ø 12 mm	
WEIGHT		280 kg	490 kg	980 kg	1560 kg	
EXT. DIMENSION						
		H.	1060 mm	1340 mm	1680 mm	2130 mm
		H1.	1280 mm	1530 mm	1210 mm	2290 mm
		H2.	970 mm	1190 mm	1485 mm	1875 mm
		W.	645 mm	910 mm	1155 mm	1440 mm
		D.	960 mm	1310 mm	1370 mm	1725 mm
		d1.	785 mm	1045 mm	1240 mm	1050 mm

*Note:

Throughputs will be varies depending on the material and screen hole diameter. The standard voltage is 3Phase, 380V, 50Hz. **We reserve the right to change specifications without prior notice. For special needs please let us know!**