

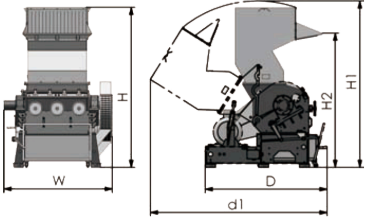
SPECIFICATION of HIGH PERFORMANCE GRANULATOR (HZS400)



HZS400-800F



- Rigid steel body to resistant of impact
- Balanced main shaft to ensure safety while running smoothly
- Equipped with spherical roller bearings, bearing housing external structure with good heat dissipation
- 3 groups or 5 groups rotors are available depending on different crushing material
- OPTIONAL: inertia flywheel to improve cutting strength

SPECIFICATION	MODEL	HZS400-800	HZS400-800F
MOTOR POWER		30 kW	
BLOWER POWER		-	4 kW
ROTOR BLADE		6 pcs	
FIXED BLADE		4 pcs	
INFEED OPENING		400 x 800 mm	
CRUSHING ROTARY SIZE		Ø 400 x 800 mm	
SCREEN SIZE		Ø 12 mm	
DRIVE DEVICE		HANDLE	
WEIGHT		2000 kg	
EXTERNAL DIMENSION			
	H.	2105 mm	
	H1.	2225 mm	
	H2.	1750 mm	
	W.	1500 mm	
	D.	1620 mm	
	d1.	2435 mm	

*Note:

Throughputs will be varies depending on the material and screen hole diameter

The standard voltage is 3Phase, 380V, 50Hz.

We reserve the right to change specifications without prior notice. For special needs please let us know!